


Unmanaged Fast Ethernet Switches

- 10/100BaseT(X) (RJ45 connector), 100BaseFX (multi/singlemode, SC or ST connector)
- Redundant dual 12/24/48 V DC, 18 to 30 V AC power inputs
- IP30 aluminum housing
- Rugged hardware design well suited for hazardous locations (Class I Div. 2 /ATEX) and maritime environments (DNV/GL)
- -40 to 75 °C operating temperature range (T models)



Technical data


Technology	
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for Flow Control
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Switch Properties	
MAC Table Size	1 K
Packet Buffer Size	512 Kbit
Interface	
Fiber Ports	100BaseFX ports (SC/ST connector, multimode, singlemode)
RJ45 Ports	10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
DIP Switches	Enable/Disable broadcast storm protection
LED Indicators	Power, 10/100M (TP port), 100M (fiber port)
Optical Fiber	
	100BaseFX
	multimode
	singlemode
Wavelength	1300 nm
Max. TX	-10 dBm
Min. TX	-20 dBm
RX Sensitivity	-32 dBm
Link Budget	12 dB
Typical Distance	5 km (50/125 µm multimode cable) 4 km (62.5/125 µm multimode cable)
Saturation	-6 dBm
	-3 dBm
Power Requirements	
Input Voltage	12/24/48 V DC (9.6 to 60 V DC), 18 to 30 V AC (47 to 63 Hz), redundant dual inputs
Input Current	IE SW BL05 5TX: 0.1 A @ 24 V IE SW BL05 SC/ST/SCS: 0.11 A @ 24 V IE SW BL08 8TX: 0.13 A @ 24 V IE SW BL08 2SC/2ST: 0.22 A @ 24 V IE SW BL08 SCS: 0.17 A @ 24 V
Overload Current Protection	1.1 A
Connection	1 removable 4-contact terminal block
Reverse Polarity Protection	Present
Physical Characteristics	
Housing	Aluminum, IP30 protection
Dimensions W x H x D	IE-SW-BL05-Series: 30 x 115 x 70 mm (1.18 x 4.52 x 2.76 in) IE-SW-BL08-Series: 50 x 115 x 70 mm (1.96 x 4.52 x 2.76 in)
Weight	IE-SW-BL05-5TX: 175 g IE-SW-BL08-8TX: 275 g
Installation	DIN-Rail mounting
Environmental Limits	
Operating Temperature	Standard Models: -10 to 60 °C (14 to 140 °F) Wide Temp. Models: -40 to 75 °C (-40 to 167 °F)
Storage Temperature	-40 to 85 °C (-40 to 185 °F)

Environmental Limits			
Ambient Relative Humidity	5 to 95 % (non-condensing)		
Regulatory Approvals			
Safety	UL508		
Hazardous Location	UL/cUL Class I, Division 2, Groups A, B, C and D; ATEX Zone 2, Ex nC IIC		
EMI	FCC Part 15, CISPR (EN55022) class A		
EMS	EN61000-4-2 (ESD), level 3; EN61000-4-3 (RS), level 3; EN61000-4-4 (EFT), level 3; EN61000-4-5 (Surge), level 3; EN61000-4-6 (CS), level 3; EN61000-4-8; EN61000-4-11		
Maritime	DNV, GL		
Shock	IEC 60068-2-27		
Freefall	IEC 60068-2-32		
Vibration	IEC 60068-2-6		
MTBF (mean time between failures)			
Time	425,000 hrs		
Database	Telcordia (Bellcore), GB		
Warranty			
Warranty Period	5 years		
Ordering Information			
Port Variants	Type	Operating Temperature	Order No.
5 * RJ45	IE-SW-BL05-5TX IE-SW-BL05T-5TX	-10 to +60 °C -40 to +75 °C	1240840000 1240850000
4 * RJ45, 1 * SC-Multimode	IE-SW-BL05-4TX-1SC IE-SW-BL05T-4TX-1SC	-10 to +60 °C -40 to +75 °C	1240890000 1286550000
4 * RJ45, 1 * ST-Multimode	IE-SW-BL05-4TX-1ST IE-SW-BL05T-4TX-1ST	-10 to +60 °C -40 to +75 °C	1240880000 1286540000
4 * RJ45, 1 * SC-Singlemode	IE-SW-BL05-4TX-1SCS IE-SW-BL05T-4TX-1SCS	-10 to +60 °C -40 to +75 °C	1240870000 1286530000
8 * RJ45	IE-SW-BL08-8TX IE-SW-BL08T-8TX	-10 to +60 °C -40 to +75 °C	1240900000 1286560000
6 * RJ45, 2 * SC-Multimode	IE-SW-BL08-6TX-2SC IE-SW-BL08T-6TX-2SC	-10 to +60 °C -40 to +75 °C	1240910000 1240920000
6 * RJ45, 2 * ST-Multimode	IE-SW-BL08-6TX-2ST IE-SW-BL08T-6TX-2ST	-10 to +60 °C -40 to +75 °C	1240930000 1286570000
7 * RJ45, 1 * SC-Singlemode	IE-SW-BL08-7TX-1SCS IE-SW-BL08T-7TX-1SCS	-10 to +60 °C -40 to +75 °C	1240950000 1286580000
Accessories			
	Type		Order No.
19" Rack Mounting Kit	RM-KIT		1241440000



Unmanaged Fast Ethernet Switches

- Redundant dual 24 V DC power inputs
- Relay output warning for power failure and port break alarm
- Broadcast storm protection
- Transparent transmission of VLAN tagged packets
- -40 to 75 °C operating temperature range (T models)

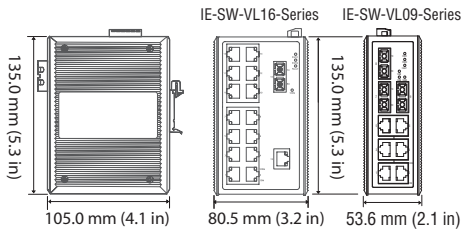


Technical data

Technology	
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for Flow Control
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Switch Properties	
MAC Table Size	1 K (IE-SW-VL09...Series), 4 K (IE-SW-VL16...Series)
Packet Buffer Size	512 Kbit (IE-SW-VL09...Series), 1.5 Mbit (IE-SW-VL16...Series)
Interface	
Fiber Ports	100BaseFX ports (SC/ST connector)
RJ45 Ports	10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
DIP Switches	Port break alarm mask
LED Indicators	PWR1, PWR2, FAULT, 10/100M (TP port), 100M (fiber port)
Alarm Contact	1 relay output with current carrying capacity of 1 A @ 24 V DC
Optical Fiber	
	100BaseFX multimode
Wavelength	1300 nm
Max. TX	-10 dBm
Min. TX	-20 dBm
RX Sensitivity	-32 dBm
Link Budget	12 dB
Typical Distance	5 km (50/125 µm multimode cable) 4 km (62,5/125 µm multimode cable)
Saturation	-6 dBm
Power Requirements	
Input Voltage	IE-SW-VL09...16-Ports: 24 V DC (12 to 45 V DC), redundant dual inputs
Input Current	IE-SW-VL09T-6TX-3SC: 0.31 A @ 24 V IE-SW-VL16-16TX: 0.27 A @ 24 V IE-SW-VL16 SC/ST: 0.44 A @ 24 V
Overload Current Protection	IE-SW-VL09/16...Series: 1.6 A
Connection	1 removable 6-pin terminal blocks
Reverse Polarity Protection	Present
Physical Characteristics	
Housing	Metal, IP30 protection
Dimensions W x H x D	IE-SW-VL09...Series: 53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in) IE-SW-VL16...Series: 80.5 x 135 x 105 mm (3.16 x 5.31 x 4.13 in)
Weight	IE-SW-VL09: 630 g IE-SW-VL16: 1140 g

Physical Characteristics			
Installation	DIN-Rail mounting		
Environmental Limits			
Operating Temperature	Standard Models: 0 to 60 °C (32 to 140 °F) Wide Temp. Models: -40 to 75 °C (-40 to 167 °F)		
Storage Temperature	-40 to 85 °C (-40 to 185 °F)		
Ambient Relative Humidity	5 to 95 % (non-condensing)		
Regulatory Approvals			
Safety	IE-SW-VL09...Series: UL508, UL60950-1, CSA C22.2 No. 60950-1, EN60950-1 IE-SW-VL16...Series: UL508, UL60950-1, EN60950-1		
Hazardous Location	UL/cUL Class I, Division 2, Groups A, B, C and D; ATEX Zone 2, Ex nC IIC		
EMI	FCC Part 15, CISPR (EN55022) class A		
EMS	EN61000-4-2 (ESD), level 3; EN61000-4-3 (RS), level 3; EN61000-4-4 (EFT), level 3; EN61000-4-5 (Surge), level 3; EN61000-4-6 (CS), level 3;		
Maritime	DNV, GL		
Shock	IEC 60068-2-27		
Freefall	IEC 60068-2-32		
Vibration	IEC 60068-2-6		
MTBF (mean time between failures)			
Time	IE-SW-VL09...Series: 396,000 hrs IE-SW-VL16...Series: 257,000 hrs		
Database	MIL-HDBK-217F, GB 25 °C		
Warranty			
Warranty Period	5 years		
Ordering Information			
Port Variants	Type	Operating Temperature	Order No.
16 * RJ45	IE-SW-VL16-16TX IE-SW-VL16T-16TX	0 to +60 °C -40 to +75 °C	1241000000 1286590000
6 * RJ45, 3 * SC-Multimode	IE-SW-VL09T-6TX-3SC	-40 to +75 °C	1240980000
14 * RJ45, 2 * SC-Multimode	IE-SW-VL16-14TX-2SC IE-SW-VL16T-14TX-2SC	0 to +60 °C -40 to +75 °C	1241030000 1286610000
14 * RJ45, 2 * ST-Multimode	IE-SW-VL16-14TX-2ST IE-SW-VL16T-14TX-2ST	0 to +60 °C -40 to +75 °C	1241050000 1286620000
Accessories			
	Type		Order No.
19" Rack Mounting Kit	RM-KIT		1241440000

Unmanaged Gigabit Ethernet Switches

- Full Gigabit Ethernet on all ports
- Variants with slots for GB SFP transceivers
- Redundant dual 12/24/48 V DC power inputs
- Relay output warning for power failure and port break alarm
- Broadcast storm protection
- Supports jumbo frame transmission (up to 9.6 KB)

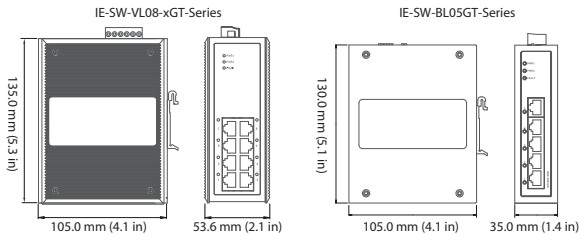

Technical data

Technology	
Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3ab for 1000BaseT(X) IEEE 802.3z for 1000BaseX IEEE 802.3x for Flow Control
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Switch Properties	
MAC Table Size	8 K
Packet Buffer Size	1088 Kbit (IE-SW-BL05-5GT), 1408 Kbit (IE-SW-VL08-xGT)
Interface	
Fiber Ports	100/1000BaseSFP slot (IE-SW-VL08-6GT-2GS)
RJ45 Ports	10/100/1000BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
DIP Switches	One for port break alarm, one for Enable/Disable broadcast storm protection
LED Indicators	PWR1, PWR2, FAULT, 10/100/1000M
Alarm Contact	1 relay output with current carrying capacity of 1 A @ 24 V DC
Power Requirements	
Input Voltage	12/24/48 V DC (9.6 to 60 V DC), redundant dual inputs
Input Current	IE-SW-BL05-5GT: 0.20 A @ 24 V IE-SW-VL08-8GT: 0.32 A @ 24 V IE-SW-VL08-6GT-2GS: 0.34 A @ 24 V
Connection	1 removable 6-contact terminal block
Reverse Polarity Protection	Present
Physical Characteristics	
Housing	Metal, IP30 protection
Dimensions	IE-SW-BL05-5GT: 35 x 130 x 105 mm (1.37 x 5.12 x 4.13 in) IE-SW-VL08-xGT: 53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
Weight	IE-SW-BL05-5GT: 290 g IE-SW-VL08-xGT: 630 g
Installation	DIN-Rail mounting
Environmental Limits	
Operating Temperature	Standard Models: 0 to 60 °C (32 to 140 °F) Wide Temp. Models: -40 to 75 °C (-40 to 167 °F)
Storage Temperature	-40 to 85 °C (-40 to 185 °F)
Ambient Relative Humidity	5 to 95 % (non-condensing)
Regulatory Approvals	
Safety	UL508
Hazardous Location	UL/cUL Class I, Division 2, Groups A, B, C, and D; ATEX Zone 2, Ex nC IIC
EMI	FCC Part 15, CISPR (EN55022) class A

Regulatory Approvals			
EMS		EN61000-4-2 (ESD), level 3; EN61000-4-3 (RS), level 3; EN61000-4-4 (EFT), level 3; EN61000-4-5 (Surge), level 3; EN61000-4-6 (CS), level 3	
Maritime		DNV, GL	
Shock		IEC 60068-2-27	
Freefall		IEC 60068-2-32	
Vibration		IEC 60068-2-6	
MTBF (meantime between failures)			
Time		478,000 hrs (IE-SW-BL05-5GT series) 325,000 hrs (IE-SW-VL08-XGT series)	
Database		Telcordia (Bellcore), GB (IE-SW-VL08-xGT series)	
Warranty			
Warranty Period		5 years	
Ordering Information			
Port Variants	Type	Operating Temperature	Order No.
5 * RJ45 10/100/1000BaseT(X)	IE-SW-BL05-5GT	0 to +60 °C	1241250000
	IE-SW-BL05T-5GT	-40 to +75 °C	1286850000
8 * RJ45 10/100/1000BaseT(X)	IE-SW-VL08-8GT	0 to +60 °C	1241270000
	IE-SW-VL08T-8GT	-40 to +75 °C	1286860000
6 * RJ45 10/100/1000BaseT(X), 2 Combo-Ports (10/100/1000 BaseT(X) or 100/1000BaseSFP)	IE-SW-VL08-6GT-2GS	0 to +60 °C	1241280000
	IE-SW-VL08T-6GT-2GS	-40 to +75 °C	1286870000
Accessories			
19" Rack Mounting Kit	RM-KIT		1241440000